DMEGC SOLAR

TIER 1 Bloomberg NEW ENERGY FINANCE


iNFINITY RT

N-type

Bifacial Module with Double Glass

DMxxxG12RT-B66HSW

610~635W

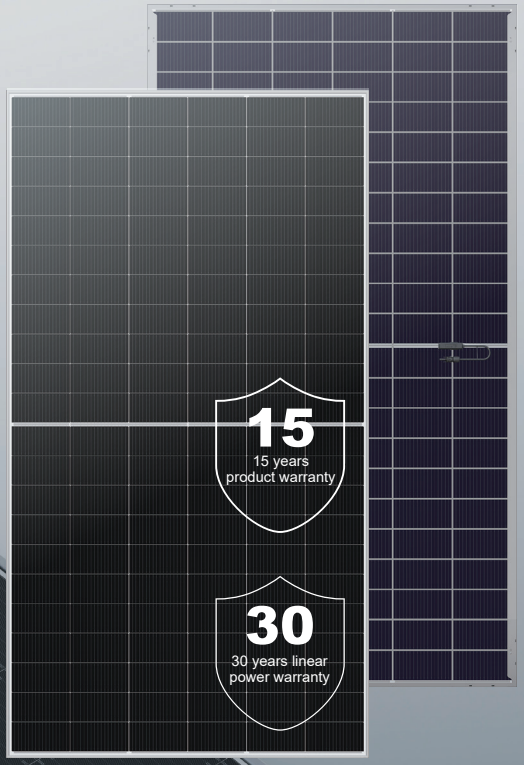

23.5%
Max. Efficiency

- **Leading manufacturing**
  40+ years experience in high-tech manufacturing.
- **High environmental, social and governance responsibility (ESG)**
  100% green production, transparent supply chain and excellent ESG rating in the solar industry.

Top Choice For Project Applications

Improved IRR with shorter amortisation time, reduced LCOE (Levelised Cost of Energy) and lower BOS (Balance of System) costs.


Extended Stress Tests

Protection against harsh environmental conditions Certified by TÜV Rheinland.

Green Product

Focus on circular economy - low carbon footprint, PFAS-free and recyclable components.

POWER WARRANTY

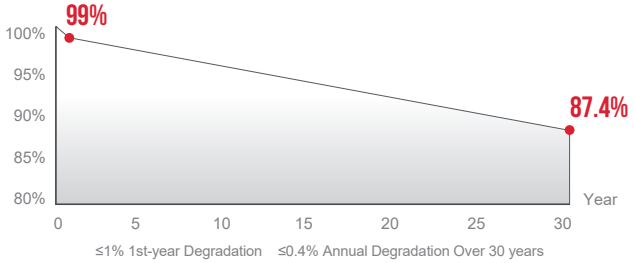

≤1% 1st-year Degradation ≤0.4% Annual Degradation Over 30 years

COMPANY MANAGEMENT SYSTEM

SA 8000: ILO Standards. Social responsibility standards
ISO 9001: Quality management system
ISO 14001: Environmental management system
ISO 45001: Occupational health and safety management system
ISO 50001: Energy management system
ISO 27001: Information security management system

PRODUCT CERTIFICATION

IEC 61215, IEC 61730
Extended-Stress (IEC TS 63209)
Ammonia Corrosion (IEC 62716)
Salt Mist Corrosion (IEC 61701)
LeTID (IEC TS 63342)
Dust & Sand (IEC 60068)

SolarPower Europe


Warranty partner
Munich RE

A member of Hengdian Group

DMxxxG12RT-B66HSW

Module Specification

Cell Type	N type Mono-crystalline, 132(6×22)
Dimensions (mm)	2382×1134×30
Weight (kg)	32.3
Front Cover	2mm heat strengthened glass, Anti-reflective coating
Rear Cover	2mm heat strengthened glass
Junction Box	3 Diodes, IP68 according to IEC 62790
Output Cables (Including Connector)	4mm²/Portrait: 300mm (+)/200mm(-) Landscape: 1400mm(+)/1400mm(-) Length can be customized
Connector Type	PV-ZH202B or MC4-EVO 2A(1500V)

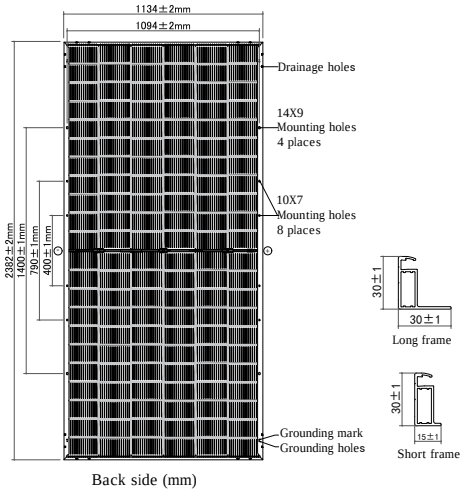

Electrical Specifications[1]

Module Type	DM610G12RT-B66HSW		DM615G12RT-B66HSW		DM620G12RT-B66HSW		DM625G12RT-B66HSW		DM630G12RT-B66HSW		DM635G12RT-B66HSW	
Testing Condition	STC[2]	NMOT[3]	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax/W)	610	465	615	469	620	472	625	476	630	480	635	484
Maximum Power Current (Imp/A)	15.09	12.26	15.15	12.31	15.20	12.35	15.25	12.39	15.30	12.43	15.35	12.47
Maximum Power Voltage (Vmp/V)	40.45	37.95	40.65	38.14	40.85	38.33	41.05	38.52	41.25	38.70	41.45	38.89
Short-circuit Current (Isc/A)	15.99	12.89	16.05	12.94	16.11	12.99	16.17	13.03	16.23	13.08	16.29	13.13
Open-circuit Voltage (Voc/V)	48.69	46.86	48.89	47.05	49.09	47.25	49.29	47.44	49.49	47.63	49.69	47.82
Module Efficiency STC (%)	22.6		22.8		23.0		23.1		23.3		23.5	

[1] Measurements according to IEC 60904-3, Measurement tolerance: Isc: ±4%, Voc: ±3%, Test uncertainty for Pmax: ±3%, Bifaciality: 80%±5%
[2] STC (Standard Test Condition): Radiation 1000W/m², Module temperature 25°C, AM=1.5
[3] NMOT: Radiation 800W/m², Ambient temperature 20°C, AM=1.5, Wind Speed 1m/s

Electrical Specifications[1](BNPI[2])

Nameplate Power (W)	610	615	620	625	630	635
Maximum Power (Pmax/W)	674	680	685	691	696	702
Maximum Power Current (Imp/A)	16.65	16.72	16.77	16.83	16.89	16.94
Maximum Power Voltage (Vmp/V)	40.50	40.70	40.90	41.10	41.30	41.50
Short-circuit Current (Isc/A)	17.59	17.66	17.72	17.79	17.86	17.92
Open-circuit Voltage (Voc/V)	48.70	48.90	49.10	49.30	49.50	49.70

[1] Measurements according to IEC 60904-3, Measurement tolerance: Isc: ±4%, Voc: ±3%, Test uncertainty for Pmax: ±3%
[2] BNPI: Front radiation 1000W/m², Rear radiation 135W/m², Module temperature 25°C, AM=1.5

Operating Conditions


Operating Temperature (°C)	-40 to +85
Maximum System Voltage (V)	1500 DC(IEC)
Overcurrent Protection Rating (A)	30
Power Output Tolerance (%)	0~3
Protection Class	Class II
Max. Test Load, Push/Pull (Pa)	Front 5400 / Back 2400
Max. Design Load, Push/Pull (Pa)	Front 3600 / Back 1600

Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42±2°C
Temperature Coefficient of Pmax (%/°C)	-0.29
Temperature Coefficient of Voc (%/°C)	-0.25
Temperature Coefficient of Isc (%/°C)	+0.048

Packaging

Container	40HQ
Pallet Dimensions (mm)	2396×1140×1250
Pieces per Pallet	36
Pieces per Container	720

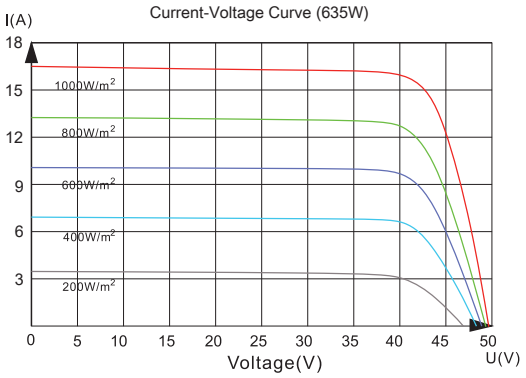

Hengdian Group DMEGC Magnetics Co.,Ltd.
Add: Hengdian Industrial Zone, Dongyang City Zhejiang Province, China 322118
Tel: 0086-579-8658-8826 **E-mail:** solar@dmegc.com.cn **Website:** www.dmegcsolar.com

DMEGC Renewable Energy B.V.
Add: Industrieweg 2,2641 RM Pijnacker, The Netherlands.
Tel: +31 (0) 8 58200765 **E-mail:** contact@dmegc.eu

Statement: The installation instructions and the warranty conditions must be followed. Due to technological progress, product parameters will be adjusted accordingly. When signing the contract, the latest data of the company shall prevail. All information in this data sheet corresponds to EN 50380. Changes and errors excepted. Document: EN DS-G12RT-B66HSW-20250619.
©DMEGC 2025 – All Rights Reserved

Distributeur: VDH Solar Groothandel B.V.
Finlandlaan 1, 2391 PV Hazerswoude-Dorp, Holland |+31 (0)172 235 990
info@vdh-solar.nl | www.vdh-solar.nl